



输出功率: 约0.1~1.0W

贵金属电刷马达

典型应用: 电子门锁

智能家居

成人玩具

OUTPUT: APPROX 0.1~1.0W

Precious Metal-brush Motors

Typical Applications: Electronic Door Lock




Smart Home Appliance

Adult Toys

1. OUTLINE DRAWING:

UNIT:MM

DIRECTION OF ROTATION

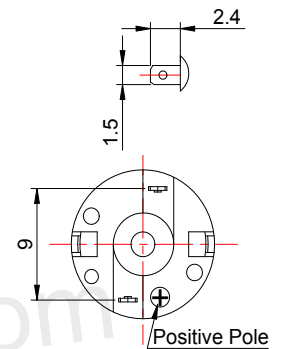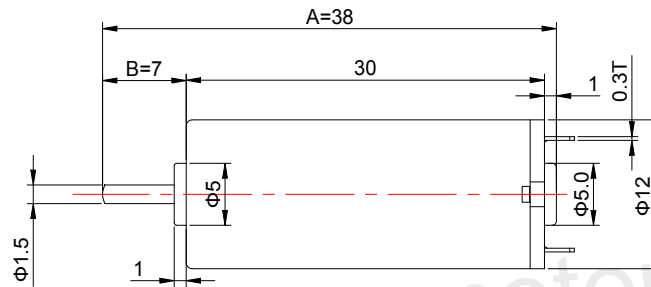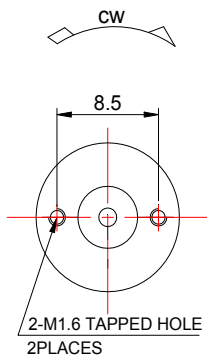


Customizable Parameters:

1. Length A and B
2. Electric Performance
3. Direction of Rotation
4. Eccentric Wheel is available

WEIGHT: 13g(Approx)

View:



2. MOTOR PERFORMANCE :

MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY					STALL		
	OPERATING RANGE	NOMINAL	SPEED	CURRENT	SPEED	CURRENT	TORQUE		OUTPUT	TORQUE		CURRENT
		V	rpm	A	rpm	A	g.cm	mN.m	W	g.cm	mN.m	A
RF-1230CA-1950	1.0~2.0	1.5	9300	0.115	7168	0.39	4	0.39	0.30	17.6	1.73	1.3
RF-1230CA-14110	1.5~3.0	3.0	12000	0.1	9312	0.35	5.8	0.57	0.56	26	2.55	1.2

